

## Globe Replacement Instructions for a Sani Disk


**NEVER SWITCH THE UNIT ON WITH THE COVER REMOVED.**

**NEVER LOOK DIRECTLY INTO THE LAMPS!**

1. **Switch the power OFF!**
2. Remove the nut and washer that hold the disc in place.



3. Carefully lower the disc and remove it from the threaded rod.
4. Remove the existing globes by unclipping the front of the globe from the metal clip and then pulling them away from the light fitting.

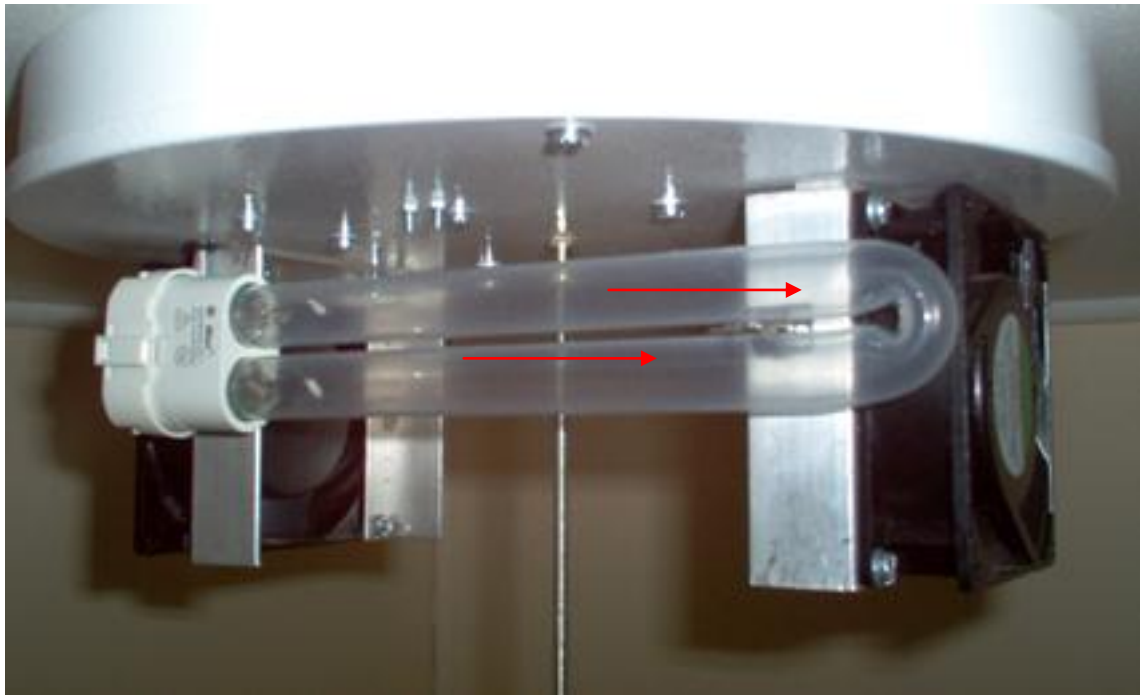

5. Insert the two (NEW) PL-18Watt globes into their holders and carefully clip the front of the globe onto the metal globe holder.
6. Replace the disc and secure with the washer and nut.
7. Switch the power back on and then unit is ready for use again.

**NEVER SWITCH THE UNIT ON WITH THE COVER REMOVED.  
NEVER LOOK DIRECTLY INTO THE LAMPS!**